

IES1028 Series

1U Rack Mounting

28-port 100M/Gigabit Layer 2 Unmanaged Industrial Ethernet Switch

- Support 4 Gigabit fiber ports (SFP slots), 24 100M fiber and copper ports optional
- Full Gigabit bandwidth can enable high performance and speed transmission of large amounts of video, voice, and data
- Input power supply voltage: 100~240VAC/DC
- Support -40~75°C wide operating temperature range



Industrial Grade


Introduction

IES1028 series are 28-port 100M/Gigabit layer 2 unmanaged industrial Ethernet switches. This series include 8 types of products and provide 100M copper port, 100M fiber port, and Gigabit SFP slot. They adopt rack mounting to meet the requirements of different application scenes.


Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, intelligent manufacturing and other industrial fields.

Dimension


Unit:mm




IES1028-4GS




IES1028-4GS-2F




IES1028-4GS-4F




IES1028-4GS-8F




IES1028-4GS-12F




IES1028-4GS-16F



IES1028-4GS-20F



IES1028-4GS-24F

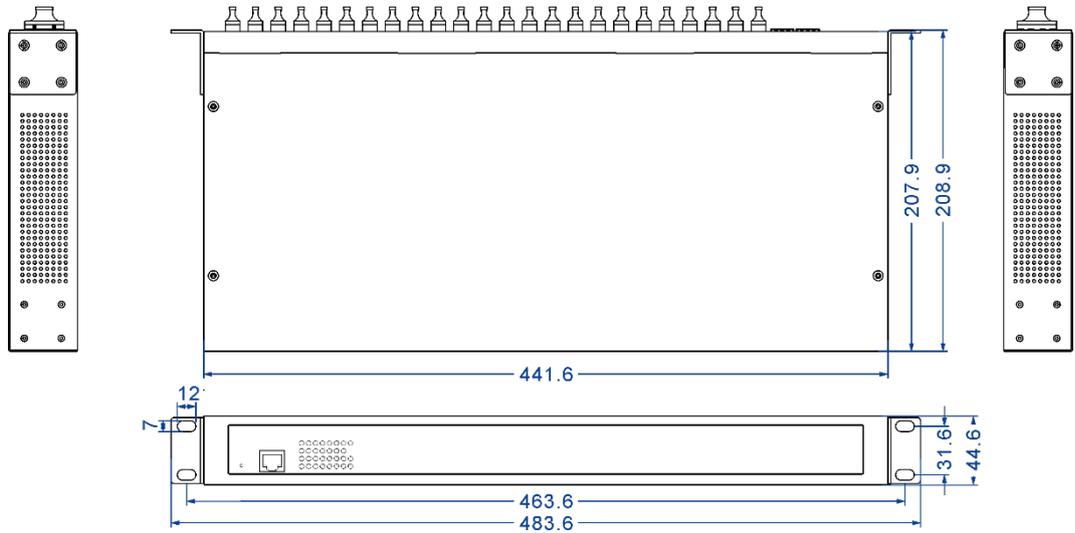

Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3z for 1000Base-X
Interface	Copper port: 10Base-T/100Base-TX, RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning Fiber port: 100Base-FX, SC/ST/FC optional SFP slot: 1000Base-SFP
LED Indicator	Running Indicator, Port Indicator, Power Supply Indicator
Switch Property	Transmission mode: store and forward MAC address: 8K Packet buffer size: 3Mbit Backplane bandwidth: 12.8G Switch time delay: <10μs
Power Requirement	100~240VAC/DC Support 8A overcurrent protection

	Model	No-load (@220VAC)	Full-load (@220VAC)
Power Consumption	IES1028-4GS	6.9W	12.4W
	IES1028-4GS-2F	8.2W	13.7W
	IES1028-4GS-4F	9.5W	15W
	IES1028-4GS-8F	12.1W	17.6W
	IES1028-4GS-12F	14.7W	20.2W
	IES1028-4GS-16F	17.3W	22.8W

IES1028-4GS-20F	18.8W	23.1W
IES1028-4GS-24F	21.4W	25.2W

Environmental Limit	<p>Operating temperature range: -40~75°C</p> <p>Storage temperature range: -40~85°C</p> <p>Relative humidity: 5% ~ 95% (no condensation)</p>
Physical Characteristic	<p>Housing: IP30 protection, metal</p> <p>Installation: 19 inches 1U rack mounting</p> <p>Dimension (W x H x D): 441.6mm×44.6mm×207.9mm</p>
Industrial Standard	<p>IEC 61000-4-2 (ESD) , Level 4</p> <ul style="list-style-type: none"> ● Air discharge: ±15kV ● Contact discharge: ±8kV <p>IEC 61000-4-4 (EFT), Level 4</p> <ul style="list-style-type: none"> ● Power supply: ±4kV ● Ethernet interface: ±2kV ● Relay: ±4kV <p>IEC 61000-4-5 (Surge), Level 3</p> <ul style="list-style-type: none"> ● Power supply: common mode ±2kV, differential mode ±1kV ● Ethernet interface: ±2kV ● Relay: common mode ±2kV, differential mode ±1kV <p>Shock: IEC 60068-2-27</p> <p>Free fall: IEC 60068-2-32</p> <p>Vibration: IEC 60068-2-6</p>
Certification	CE, FCC, RoHS
Warranty	5 years

Ordering Information

Available Models	Gigabit SFP slot	100M Fiber Port	100M Copper Port	Power Supply Range
IES1028-4GS	4	—	24	100~240VAC/DC
IES1028-4GS-2F	4	2	22	
IES1028-4GS-4F	4	4	20	
IES1028-4GS-8F	4	8	16	
IES1028-4GS-12F	4	12	12	
IES1028-4GS-16F	4	16	8	
IES1028-4GS-20F	4	20	4	
IES1028-4GS-24F	4	24	—	



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

⬅ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.