

2-port 10/100/1000M Base-T(X) + 1-port 1000M FX, VLAN Function

➤ Features

- Accord to IEEE802.1 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-TX, IEEE802.3z 1000Base-SX/LX;
- Support MDI/MDI-X auto negotiation, 10M/100/1000M adaptive;
- Support flow control;
- Supports full /half duplex, Point-to-point transparent transmission;
- Support non-blocking wire-speed forwarding;
- Support VLAN Function;
- Plug-and-play, no configuration is required;
- LED indicators for easy diagnosis and monitoring work status;
- Support External power 5VDC input;
- Support 0-50°C wide operating temperature range;
- Low power consumption, No fan, Metal casing;
- Support stand-alone or wall Installation;
- FCC Class A & CE approved, RoHS compliance;
- Warranty:3years



➤ Introduction

Ethernet Media Converter, also known as Fiber Optic Media Converter, is a network device that transparently converts data between short-distance electrical signals and long-distance fiber optic signals, plug-and-play, no configuration required, can be operated at wide temperatures range from 0 to 50°C.

UPCOM MC202-VLAN Fiber Media Converter support 2-port 10/100/1000M Base-T(X)+1-port 1000M FX, VLAN function, adopts durable metal housing, external DC5V, is a flexible and cost-effective solution that can extend transmission distances to 120km through a single-mode fiber, protecting data from noise and electromagnetic interference.


MC202-VLAN is ultra-small in size, with shielded RJ45 Ethernet jack, optional SC/ST/FC fiber-optic connector. Built-in auto-sensing function supports full or half-duplex Ethernet operation, widely used in MAN (metropolitan area network), security monitoring, intelligent transportation and other applications.

MC202-VLAN supports stand-alone installation, can realize the interconnection between repeaters, hubs, switches, terminals. all photoelectric interfaces conform to international standards, and the products are suitable for different harsh industrial environments. The installation and operating procedures of the Fiber Optic Media Converter are simple and straightforward. Operation status can be monitored through a set of Diagnostic LED located on the front panel, including single-mode and multi-mode transmission modes, the multi-mode can transmit 2km, single-mode can reach up to 120km.

➤ Specification

Specification	
Product Name	2-port 10/100/1000M Base-T(X)+1-port 1000M FX Ethernet Media Converter
Product Model	MC202-VLAN
Port Definition	2-port 10/100/1000M Base-T(X)+1-port 1000M FX
Standards	IEEE802.1 10Base-T, IEEE802.3u 100Base-TX,IEEE802.3ab 1000Base-TX, IEEE802.3z 1000Base-SX/LX
RJ45 port rate	10/100/1000Mbps auto negotiation
Optic port rate	1000Mbps
Working Mode	Asynchronous, point to point
Transmission mode	Half/Full duplex
Forwarding Mode	Store and Forward(Full Wire Speed)
VLAN Function	Support
Transfer distance	
RJ45port	100m
Fiber optic	20,40,60,80,100,120km(SM),2 km(MM) optional
RJ45 port cable	UTP 5E
Fiber connector	SC, ST, FC optional
Fiber optic cables	Single Mode:8.3/125,8.7/125,9/125 or 10/125μm Muti-Mode:50/125,62.5/125μm
Wavelength	850nm,1310nm,1550nm
Power	
Power supply	External 5VDC/1A
Consumption	<3W
Operating Temperature	0-50°C
Storage temperature	-40°C to 70°C
Ambient Humidity	5%~95% (non-condensing)
MTBF	≥10.0000h
Physical Characteristics	
Shell	Iron
Dimension	94mm*70.5mm*26.5mm
Weight	390g(power external)
Installation	Desktop, 2U-14 slot rack-mount Chassis
Warranty	
Warranty	3 Years
Certification	CE, FCC, RoHS

➤ Application

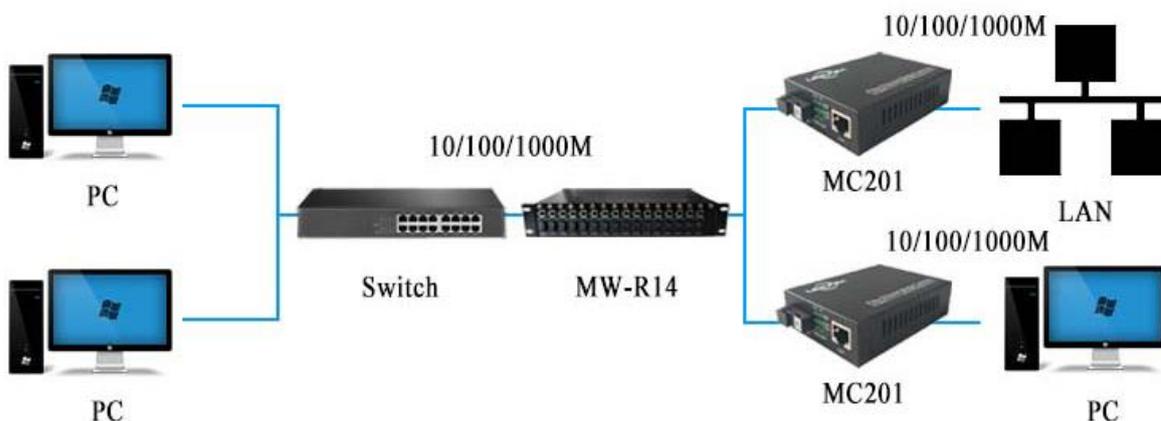

➤ Ordering Information

Model NO.	Description
MC202-VLAN-M-2	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Multi-mode, 2Km, 5VDC, SC/FC/ST optional
MC202-VLAN-S-20	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, 20Km, 5VDC, SC/FC/ST optional
MC202-VLAN-S-40	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, 40Km, 5VDC, SC/FC/ST optional
MC202-VLAN-S-80	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, 80Km, 5VDC, SC/FC/ST optional
MC202-VLAN-S-120	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, 120Km, 5VDC, SC/FC/ST optional
MC202-VLAN-SS-20	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, Single fiber, 20Km, 5VDC, SC/FC/ST
MC202-VLAN-SS-40	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, Single fiber, 40Km, 5VDC, SC/FC/ST
MC202-VLAN-SS-80	2-port 10/100/1000M Base-T(X)+1-port 1000M FX, Single-mode, Single fiber, 80Km, 5VDC, SC/FC/ST

➤ Packing List

- Ethernet Media Converter *1
- DC5V power supply *1
- User manual * 1
- Certificate of quality * 1
- Warranty card * 1