



1-Port RS232/RS422/RS485 Industrial Serial Device Server, Din-Rail

➤ Features

- Support 1-port 10/100BASE-T(X) + 1-port RS232/RS-485/422;
- Support IEEE802.3/802.3u standard, store and forward Exchange Mode;
- Support TCP server, TCP client, UDP three serial transmission mode, 110~115200bps line speed non-blocking communication;
- Support TCP, UDP, Modbus TCP, Modbus RTU, ARP, ICMP, HTTP, TFTP;
- Support Modbus TCP(RTU_MASTER);
- Support Web management;
- Support serial port settings, can connect two serial devices via Ethernet;
- Supports gateway, cross-routing communication;
- Low-power consumption design;
- Metal housing with IP40 and high level EMC protection;
- Support redundant wide voltage 12-48V DC power input;
- Support DIN-Rail Mounting or Wall Mounting installation;
- Working temperature range:-40~85°C;
- Warranty:5years



➤ Introduction

MW1011 Din-Rail industrial serial server support 1-channel RS232/RS-485/422 + 1-port 10/100Base-T(X), adopts high-strength IP40 protective shell, industrial-grade EMC design, supports Auto-Negotiation adaptive technology, provides LED status indication, and supports voltage 12~48V DC power input to increase the reliability of the communication network.

MW1011 can easily and conveniently centralize the management of scattered serial devices and hosts through the network. The communication rate supports 110~115200bps optional. Built-in Modbus TCP and Modbus RTU protocols, users can easily connect Modbus Ethernet devices and Modbus serial devices. Based on industrial installation requirements, 35mm rail installation mode is provided. This product adopts the industry's excellent network solution, and the operating temperature range is -40~85°C, which can meet the requirements of various industrial scenes and provide convenient serial communication solutions.

➤ Application Industries


- Industrial Automation
- Intelligent transportation supervisory system (ITS)
- High-speed Way supervisory/Tele-Communication System
- Security Surveillance
- New Energy and Utilities
- Rail transportation industry

➤ Specification

Interface	
RJ45 port	10/100BASE-T(X) auto-Negotiation speed, auto duplex mode and MDI/MDI-X connection
Serial port	RS-422 supports RX-, RX+, TX-, TX+ full duplex working mode
	RS-485 supports A and B half-duplex working mode
	RS-232 supports RXD, TXD, GND full duplex working mode
	RS-485/422/232 Communication rate support 110~115200bps optional
Ethernet Attribute	
Standard	10Base-T, 100Base-TX
Protocol	Supports TCP, UDP, ARP and ICMP protocol
Signal	Rx-, Rx+, Tx-, Tx+;
Rate	10M/100Mbps
Duplex mode	Full duplex or Half duplex
Interface cache	Maximum support for 1Mbits cache
Interface connector	RJ45
Serial Port Attribute	
Standard	RS-485/422/232
RS-422 signal	TX+, TX-, RX+, RX-, GND
RS-485 signal	A, B, GND
RS-232 signal	TXD, RXD ,GND
Check digit	None, Even, Odd, Mark, Space
Data bits	5bit, 6bit, 7bit, 8bit
Stop bit	1bit, 2bit
Baud rate	110~115200bps
Directional control	RS-485 adopts data flow control technology
Load capacity	RS-485/422 side supports 32 point polling environment, can up to 128
Interface connector	RS-485/422 and adopts 5-bit 5.08mm spacing terminal
	RS-232 and adopts DB9-M interface
LED Indicator	
Power indicator	PWR
System running indicator	RUN
RS-232 Status indicator	RS-232
RS-485/422 indicator	RS-485/422
Power Supply	

Input	12~48VDC with 7.62mm industrial power terminal
Power	< 1.44W (@24VDC)
Physical Characteristics	
Shell	Metal, IP40 protection
Installation	Wall mounting or DIN rail mounting
Dimension	32mm×103mm×83mm (W*H*D)
Net weight	200g
Environment Limits	
Working Temp	-40~85°C
Storage Temp	-40~85°C
Relative Humidity	5%~95% (no-condensation)
Industry standard	
IEC61000-4-2	ESD: ±8KV Contact Discharge, ±15KV Air Discharge
IEC61000-4-3	RS: 10V/m (80-1000MHZ)
IEC61000-4-4	EFT: Power ±4KV, Ethernet & Serial Data Cable ±2KV
IEC61000-4-5	Power ±4KV CM/ ±1KV DM, Ethernet Data Cable±4KV CM, Serial Data Cable±1KV CM
IEC61000-4-6	Radio Frequency Conduction: 3V(10KHZ-150KHZ),10V(150KHZ-80MHZ)
IEC61000-4-16	Common Mode Conduction: 30V COUNT 300V, 1S
IEC60068-2-6	Vibration
IEC60068-2-27	Shock
IEC60068-2-32	Free Fall
IEC61000-6-2	General Industrial Standard
Warranty	
Warranty	5 Years
Certification	CE, FCC, RoHS

➤ Dimension

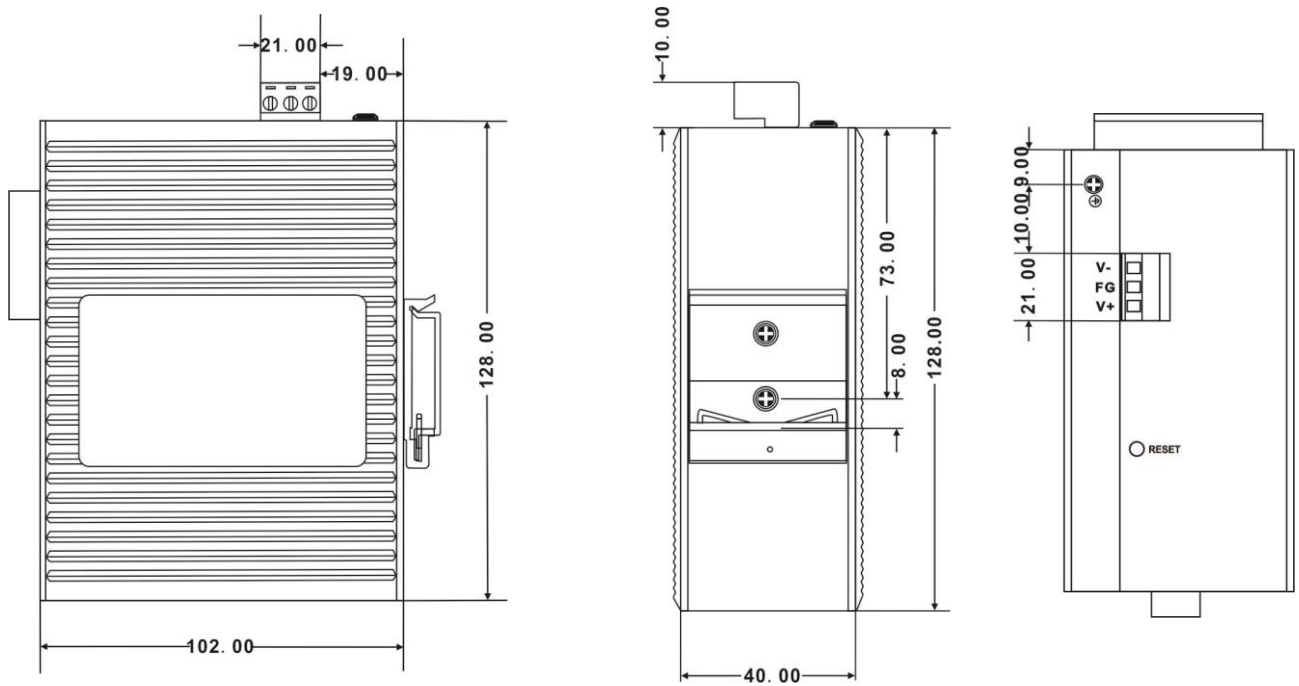

➤ Ordering Information

Model NO.	Description
MW1011	1-channel RS232/RS-485/422 + 1-port 10/100Base-T(X) RJ45, DC12-48V
MW2041	1-channel RS-485/422 + 4-port 10/100Base-T(X) RJ45, DC12-48V
MW2044	4-channel RS-485 + 4-port 10/100Base-T(X) RJ45, DC12-48V, 500V Isolation
MW2144	4-channel RS-485+ 4-port 10/100Base-T(X) RJ45+1-port 100M fiber, DC12-48V, 500V Isolation
MW2244	4-channel RS-485 + 4-port 10/100Base-T(X) RJ45+2-port 100M fiber, DC12-48V, 500V Isolation

➤ Packing List

- Industrial Serial Device Server *1
- User manual * 1
- Certificate of quality * 1
- Warranty card * 1