

6-port Full Gigabit Industrial PoE Switch

- 5*10/100/1000M RJ45 ports and 1*1000M uplink SFP slot port, port 1-4 can support PoE.
- Dual uplink SFP fiber port , long-distance transmission
- Dual power supply redundant input
- 6KV port lightning protection,
- -40°C—+80°C operation temperature
- Large cache military-level master chip configuration
- IP40 protection,aluminum alloy case




OVERVIEW

The PIES206G-GS-4P series is a full gigabit industrial PoE fiber switch. It has 5*10/100/1000Base-T RJ45 ports and 1*1000Base-X uplink SFP slot port. Port 1-4 can support IEEE 802.3af/at PoE standard, single-port PoE power up to 30W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal device such as wireless AP, IP camera, industrial sensor through the network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, sea transportation. Industrial scenes such as metallurgy and green energy construction form a cost-effective, stable and reliable communication network. Unmanaged mode, plug, and play, no configuration, easy to use.

FEATURE


- **Gigabit Ethernet port access, uplink gigabit dual SFP port**

- ◇ Uplink gigabit SFP fiber port, easy to achieve high bandwidth and long-distance transmission.
- ◇ SFP fiber port can cascade, chain, compatible with SFP module connection.

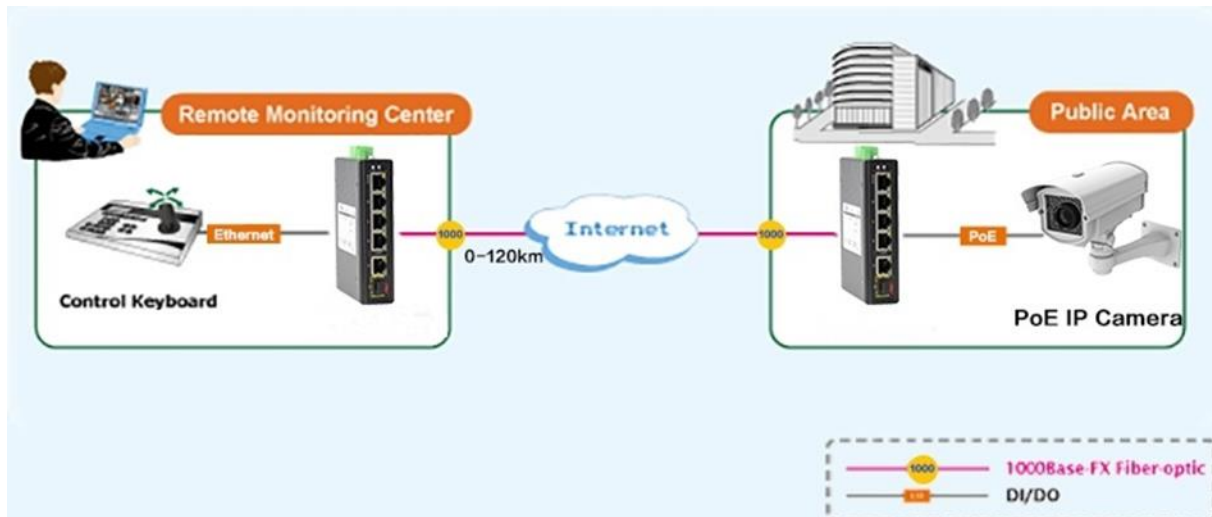

- **Port lightning protection, wide voltage input**

- ◇ Contact discharge 8KV, air discharge 15KV; port lightning protection common-mode 4KV, differential mode 2KV;
- ◇ Industrial dual power input.
- ◇ DC INPUT: 48V-57V, non-PoE DC INPUT: 12-48V.

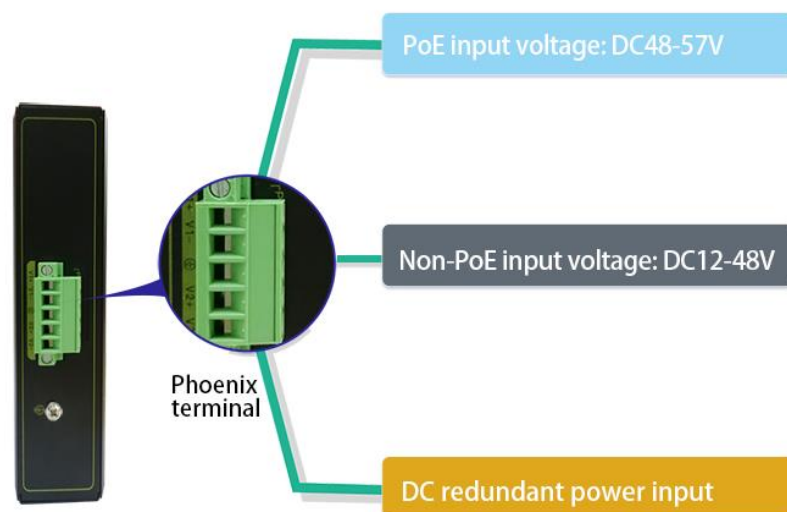

- **Intelligent PoE power supply**

- ◇ 4*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

■ Stable and reliable

- ◇ Low power consumption, No fan low noise design, aluminum shell.
- ◇ CCC,CE, FCC, RoHS.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR,SYS, Link, L/A,PoE.


TECHNICAL SPECIFICATION

Model	PIES206G-GS-4P	PIES206G-GS-4P-at
Interface Characteristics		
Fixed Port	4*10/100/1000Base-T PoE ports (Data/Power) 1*10/100/1000Base-T uplink RJ45 port (Data) 1*1000Base-X uplink SFP fiber slot port (Data) 2 sets of V+, V- redundant DC power port (5P Phoenix terminal)	
Ethernet Port	Port 1-4 support 10/100/1000Base-T auto-sensing, full/half duplex MDI/MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)	
Fiber Port	Gigabit SFP optical fiber port, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)	
Optical Cable	Multimode: 850nm 0 ~ 550M,	

	singlemode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.	
Chip Parameter		
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T	
	IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T	
	IEEE802.3z 1000Base-X, IEEE802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	12Gbps	
Forwarding Rate@64byte	8.93Mpps	
MAC	2K	
Buffer Memory	2M	
Jumbo Frames	9.2K	
LED Indicator	Power: PWR (green), Network : Link (yellow), PoE : PoE (green) Fiber port :6 (green)	
PoE & Power		
PoE Port	Port 1 to 4 IEEE802.3af/at @ POE	
Power Supply Pin	1/2 (+), 3/6 (-)&4/5 (+), 7/8 (-) 4-pairs power supply	
Max Power Per Port	30W; IEEE802.3af/at	
Total PWR / Input Voltage	60W/48VDC	120W/48VDC
Power Consumption	Standby<5W, Full load<120W	Standby<6W, Full load<240W
Working Voltage	48-57VDC; 5P industrial phoenix terminal, anti-reverse protection.	
Power Supply	No, optional 48V/120W or 48V/240W industrial power supply	
Physical Parameter		


Operation TEMP / Humidity	-40~+80°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+85°C;5%~95% RH Non condensing
Dimension	119*100*30mm
Net /Gross Weight	<0.7kg /<1.0kg
Installation	Desktop, 35mm DIN rail
Certification & Warranty	
Lightning Protection / Protection Level	Lightning protection: 6KV 8/20us;Protection level: IP40 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022):Class A IEC61000-6-2(Common Industrial Standard)
Mechanical Properties	IEC60068-2-6 (anti vibration),IEC60068-2-27 (anti shock),IEC60068-2-32 (free fall)
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B;RoHS;

DIMENSION

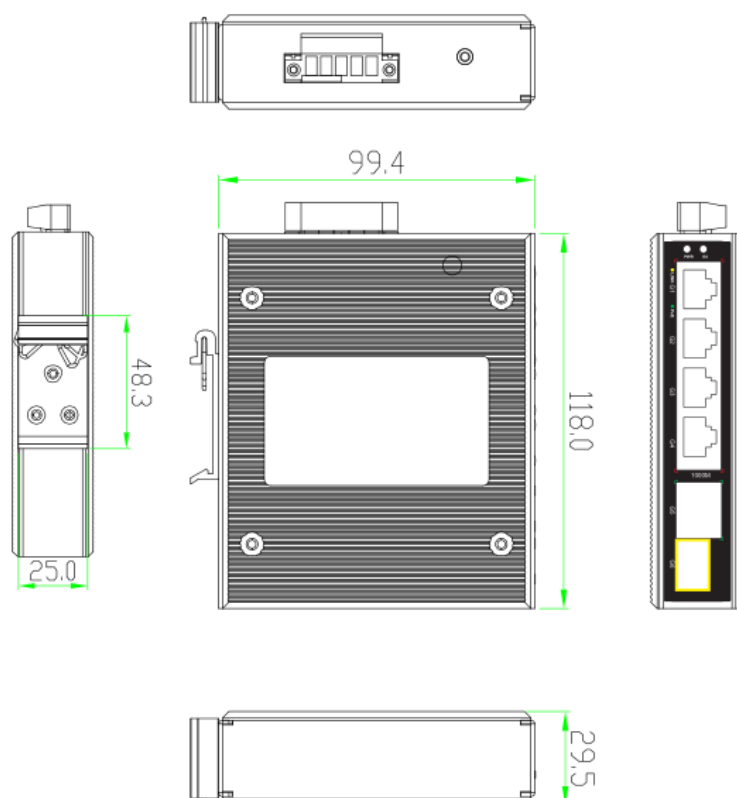

APPLICATION

1. Network topology

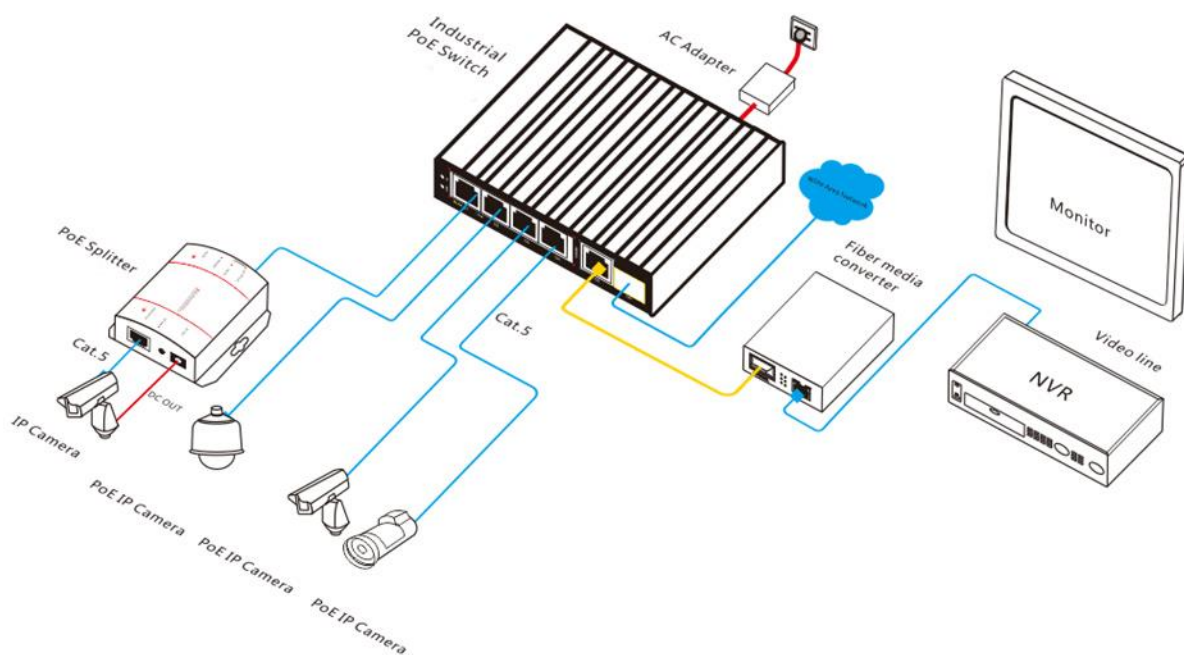

ORDERING INFORMATION

Model	Description	Recommended power supply
PIES206G-GS-4P	Unmanaged industrial PoE fiber switch with 5*10/100/1000M RJ45 ports and 1*1000M uplink SFP slot port, Port 1-4 can support IEEE802.3af/at PoE. Support DC dual power supply input and DIN rail mounting.	60W
PIES206G-GS-4P-at		120W
Note: Industrial PoE switch does not match the SFP optical module and power supply.		

PACKING LIST

PACKING LIST	CONTENT	QTY	UNIT
	6-port full gigabit industrial PoE fiber switch	1	SET
	User Guide	1	PC

	Warranty Card	1	PC
--	---------------	---	----

POWER SUPPLY SELECTION TABLE

Product	Model	Description	Unit
65W Desktop Power Adaptor	AP65-52	Desktop tape 65W single set of output power adapter; Input Voltage:AC 100V~240V 50-60Hz,1.1A Output Voltage:DC 52V 1.25A Operation Temperature:-20°C—+65°C	PC
110W Desktop Power Adaptor	AP110-52	Desktop tape 110W single set of output power adapter; Input Voltage:AC 100V~240V 50-60Hz,2.0A Output Voltage:DC 52V 2.0A Operation Temperature:-20°C—+65°C	PC
60W DIN Rail Industrial Power Supply	DP60-48	Din Rail type 60W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,1A Output Voltage:DC 48V 1.25A Operation Temperature:-40°C—+70°C	PC
120W DIN Rail Industrial Power Supply	DP120-48	Din Rail type 120W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz,1.5A	PC



Industrial PoE Fiber Switch

		Output Voltage:DC 48V 2.5A Operation Temperature:-40℃—+70℃	
--	--	---	--