



IES7116G-8GS

DIN-Rail Mounting

16-port Full Gigabit Layer 2 Managed Industrial Ethernet Switch

- Support 8 Gigabit fiber ports (SFP slots), 8 Gigabit copper ports
- Adopt SW-Ring patent technology, support single ring, coupling ring, chain ring, Dual-homing ring network function, automatic recovery time of network failure < 20ms
- Support dual power supply input, input voltage: 12~48VDC
- Support -40~75°C wide operating temperature range



Introduction

IES7116G-8GS is 16-port full Gigabit layer 2 managed industrial Ethernet switches. This product provides Gigabit copper port and Gigabit SFP slot. It adopts DIN-Rail mounting to meet the requirements of different application scenes.

Network management system supports various network protocols and industrial standards, such as STP/RSTP/MSTP, 802.1Q VLAN, QoS, IGMP Static Multicast, LLDP, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Port Statistics, Access Control, 802.1X Authentication, Network Diagnosis, Rapid Configuration, Online Upgrading and so on, and supports CLI, WEB, Telnet, SNMP and other access methods. It can provide users with good experience with friendly design of network management system interface, simple and convenient operation.

Power supply input is two independent power supply circuits, which can ensure the device normal operation when one of the power supplies breaks down. Design of DIP switch can achieve the device rebooting and restore factory defaults. When power supply or port occurs link failure, ALARM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.


Features and Benefits

- ⊙ SNMPv1/v2c/v3 is used for network management of various levels
- ⊙ RMON can be used for efficient and flexible network monitoring
- ⊙ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⊙ QoS supports real-time traffic classification and priority setting
- ⊙ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⊙ DHCP server and client can be used for distributing IP address
- ⊙ File management is convenient for the device rapid configuration and online upgrading
- ⊙ Log management has recorded booting, operation and connection information
- ⊙ Bandwidth management can reasonably distribute network bandwidth, preventing unpredictable network status
- ⊙ Port statistics can be used for port real-time traffic statistics
- ⊙ Support Console/Telnet/WEB management method
- ⊙ User password can conduct user hierarchical management to improve the device management security

- ⦿ Anti-attack control, ACL and 802.1X authentication can enhance the network flexibility and security
- ⦿ E-mail alarm is convenient for immediate fault discovery during remote management
- ⦿ Relay alarm is convenient for troubleshooting of construction site
- ⦿ Storm suppression can restrain the broadcast, unknown multicast and unknown unicast
- ⦿ SSHD configuration can achieve data transmission encryption, preventing DNS and IP spoofing
- ⦿ TELNET and HTTPS configuration can guarantee the data access security
- ⦿ VLAN is used for simplifying network planning
- ⦿ Port trunking and LACP can increase network bandwidth and enhance the reliability of network connection to achieve optimum bandwidth utilization
- ⦿ IGMP Snooping, GMRP and static multicast can be used for filtering multicast traffic to save the network bandwidth
- ⦿ Support Port Isolation in the same VLAN
- ⦿ SW-Ring and STP/RSTP/MSTP can achieve network redundancy, preventing network storm
- ⦿ Network Diagnosis and Troubleshooting can be conducted via Ping, Traceroute and Port Loopback

Dimension

Unit:mm

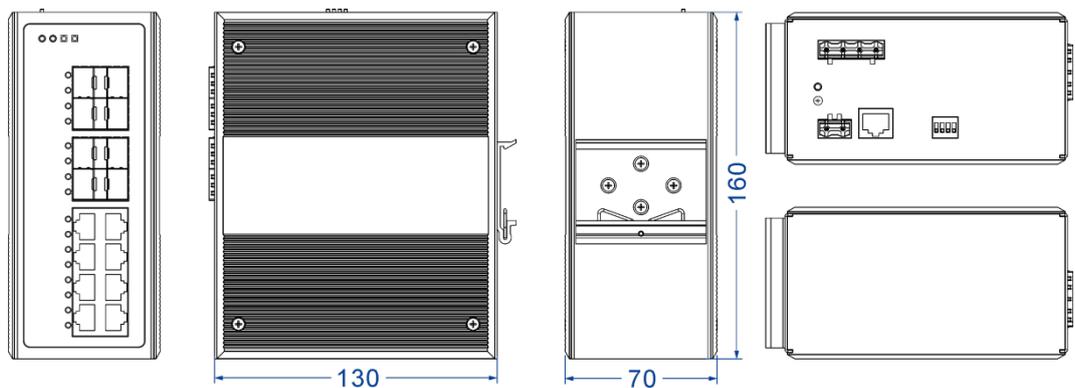

Specification

| | |
|---------------------|--|
| Standard & Protocol | <p>IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1Q for VLAN IEEE 802.1p for CoS IEEE 802.1X for 802.1X Authentication IEEE 802.1AB for LLDP IEEE 802.3ad for LACP</p> |
| Management | <p>SNMP v1/v2c/v3 Centralized Management of Equipment, RMON, Port Mirroring, QoS, LLDP, DHCP Server, DHCP Client, File Management, Log Management, Port Statistics</p> |
| Security | <p>Classification of User Permissions, Anti-attack Control, ACL, 802.1X Authentication, Port Alarm, Power Supply Alarm, E-mail Alarm, Storm Suppression, SSHD Configuration, Telnet Configuration, HTTPS Configuration</p> |
| Switch Function | <p>802.1Q Vlan, Static/Dynamic Port Aggregation, Bandwidth Management, Flow Control, Port Isolation</p> |
| Unicast / Multicast | <p>Static Multicast, GMRP, IGMP-Snooping</p> |
| Redundancy Protocol | <p>SW-Ring, STP/RSTP/MSTP</p> |
| Fault Diagnosis | <p>Ping, Traceroute, Port Loopback</p> |
| Time Management | <p>Sntp</p> |
| Interface | <p>Copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning SFP slot: 1000Base-SFP Console port: CLI command line management port (RS-232), RJ45 Alarm port: 2-pin 7.62mm pitch terminal blocks, support 1 relay alarm output, current carrying capacity 1A@24VDC or 0.5A@120VAC</p> |
| LED Indicator | <p>Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator</p> |
| Switch Property | <p>Transmission mode: store and forward</p> |

| | |
|--------------------------------|--|
| | <p>MAC address: 16K Packet buffer size: 12Mbit Backplane bandwidth: 56G Switch time delay: < 5μs</p> |
| Power Requirement | <p>12~48VDC, 4-pin 7.62mm pitch terminal blocks dual power supply redundancy, reverse polarity protection, nonpolarity</p> |
| Power Consumption | <p>No-load: 10.99W@24VDC Full-load: 20.69W@24VDC</p> |
| Environmental Limit | <p>Operating temperature range: -40~75°C Storage temperature range: -40~75°C Relative humidity: 5% ~ 95% (no condensation)</p> |
| Physical Characteristic | <p>Housing: IP40 protection, metal Installation: DIN-Rail mounting Weight: 1.1kg Dimension (W x H x D): 70mm×160mm×130mm</p> |
| Industrial Standard | <p>IEC 61000-4-2 (ESD) , Level 4</p> <ul style="list-style-type: none"> ● Air discharge: ±15kV ● Contact discharge: ±8kV <p>IEC 61000-4-4 (EFT), Level 4</p> <ul style="list-style-type: none"> ● Power supply: ±4kV ● Ethernet interface: ±2kV ● Relay: ±4kV <p>IEC 61000-4-5 (Surge), Level 4</p> <ul style="list-style-type: none"> ● Power supply: common mode ±4kV, differential mode ±2kV ● Relay: common mode ±4kV, differential mode ±2kV <p>Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6</p> |
| Certification | <p>CE, FCC, RoHS</p> |
| Warranty | <p>5 years</p> |



Ordering Information

| Available Models | Gigabit SFP | Gigabit Copper Port | Power Supply Range |
|------------------|-------------|---------------------|----------------------------|
| IES7116G-8GS | 8 | 8 | 12~48VDC dual power supply |



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.