

## 4 CH AHD/CVI/TVI Over Fiber Converter with 1-port RS485 (720P,960P,1080P)

### ➤ Features

- Support 4 channels AHD/CVI/TVI Over Fiber Converter with 1-port RS485, 1080P;
- Lossless non-compression real time transmission;
- CWDM technology offer 3.2G bandwidth to 4ch video , support higher performance;
- Automatically identify formats of input video: AHD/TVI/CVI/PAL/NTSC/SECAM;
- Support 720P/25/30/50Hz, 960P/25/30Hz,1080P/30Hz;
- Support FC connector, single fiber, single mode,20km;
- Support External power DC5V;
- Advanced lightning protection design ,support 5.7KV lightning protection;
- Through LED indicators to inform its functional mode;
- Wide range of operational temperature(-15 °C ~65°C);
- Stand-alone, simple installation;
- Compatible with AHD/CVI/TVI Cameras;
- Warranty: 3 years;



### ➤ Introduction

CHD0401-1080 supports 4-Ch TVI/CVI/AHD TO Fiber Converters is universal type supporting High Definition Analog video format HD-TVI / HD-CVI / AHD, can simultaneously transmit 4 channels video with 1-port RS485 over one core multimode or single-mode optical fiber. It also supports the regular analog video format such as PAL / NTSC /SECAM, it is a kind of universal fiber transmission solution / product for CCTV analog video/data signals.

Devices are available for either standalone or rack-mount installation, which is suitable for different working environment. Electronic and optical adjustments are never required. LED indicators are provided for instantly monitoring system status.

### ➤ Application


- HD monitor transmission and power supply
- Security protection system, TV medical treatment
- Network telephone transmission, Intelligent house and home system
- Intelligent transportation supervisory system (ITS)
- High-speed Way supervisory/Tele-Communication System
- Long-distance Multi-media Schooling, Campus monitoring
- Long-distance broadcast television transmission system
- High-building Security Protection, Military Tele-Com project
- Smart City

## ➤ Specification

<b>Video</b>	
Number of Channels	4
Input/output impedance	75 Ohm (unbalance)
Standard video input/output voltage	1.0Vp-p
Video Bandwidth	50MHz
Sampling Bandwidth	8bit
Sampling Frequency	108MHz
Signal to noise ratio	>67dB
Rise and Fall time	<0.8ns
Optical Signal Intrinsic Jitter	<0.2 UI
Differential Gain	< ±1.5%
Differential Phase	< ±1°
Connector	BNC
Supporting video pixel	1280(H)x720(V)@30Hz/1MPX 1280(H)x720(V)@50Hz/1MPX 1280(H)x960(V)@30Hz/1.3MPX 1920(H)x1080(V)@30Hz/2MPX
<b>Optics</b>	
Wavelength	CWDM:1310nm/1550nm
Output Power	-8~-3dBm
Optic fiber	50/125u multimode, 62.5/125u multimode, 9/125u single mode
Rx sensitivity	-26dBm
Optical connector	FC/ST/SC (optional)
Distance	0~550M (MM) / 0~80KM (SM) (Default distance is 20Km)
<b>Data</b>	
Protocol	Default :RS485 (RS232/RS422 Optional)
Number of channels	1
Connector	9pins Terminal Blocks
Data Rate	0-200Kbps
Directions	Default :Simplex from Rx to Tx (BIDI duplex optional)
<b>Others</b>	
Power	DC5V 2A
Power Consumption	≤6W

Working Temperature	-15 °C ~65°C
Storage Temperature	-40°C ~85°C
Relative Humidity	5%~95% ( no condensation)
MTBF	100,000 hours
Warranty	3 Years

## ➤ Connection

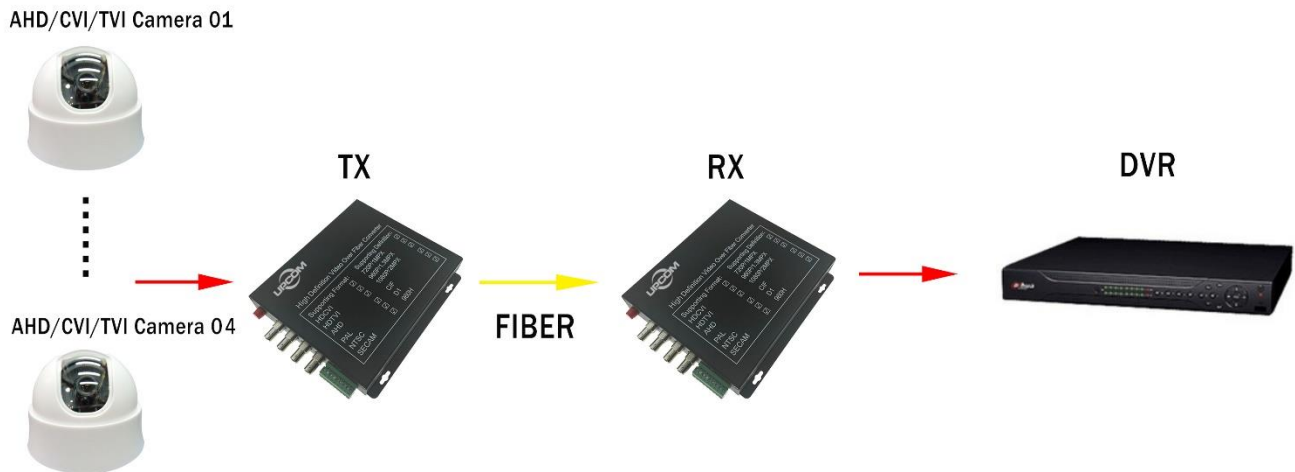

## ➤ Ordering Information

Model NO.	Description
CHD0400-1080	4 ch AHD/CVI/TVI Over Fiber Converter, 1080P, FC, 20km,DC5V
CHD0401-1080	4 ch AHD/CVI/TVI Over Fiber Converter with 1-port RS485, 1080P, FC, 20km,DC5V

## ➤ Packing List

- AHD/CVI/TVI Over Fiber Converter \*1
- Power adapter \*1
- User manual \* 1
- Certificate of quality \* 1
- Warranty card \* 1